# Current/voltage tester

## PAN Allrounder 200AD

PROFI

**Easy to use like a voltage tester, versatile like a multimeter: Current/ voltage tester with LED + LCD display 1000V, 200A AC/DC True RMS**

- Low voltages up to 24 V: green LEDs, dangerous voltages from 230 V: red LEDs
- Analog LED and backlit digital LCD display
- **2-pole rotary field indication**
- **Non contact voltage test (3 levels) (NCV)**
- Single pole phase test with acustic indication
- Data Hold
- Diode test
- **LED flashlight**
- **Vibrate alert and beep for confident feedback in any environment**
- Auto power off

**Scope of delivery:** test leads, screw-contact sleeves for perfect contact in sockets, Operating manual

| Technical Data | PAN Allrounder 200AD |
|---|---|
| DC voltage (V =) | 0,1 V - 1500 V |
| AC voltage (V ~) | 0,1 V - 1000 V |
| DC current (A =) | 0,1 A - 200 A |
| AC current (A ~) | 0,1 A - 200 A |
| Resistance (Ω) | 1 Ω - 100 kΩ |
| Continuity test •))) | < 40 Ω / < 500 kΩ |
| Frequency (Hz) | 1 Hz - 800 Hz |
| Accuracy (%) | 3 % - 5 % |
| Jaw opening ⌀ | 15 mm |
| Dimensions | 197 x 63 x 36 mm |
| Weight (gross / net) | 494 / 296 g |
| Required battery(s): | 2 x 1,5V AAA |
| Measuring category (CAT) | CAT III 1000 V / CAT IV 600 V |

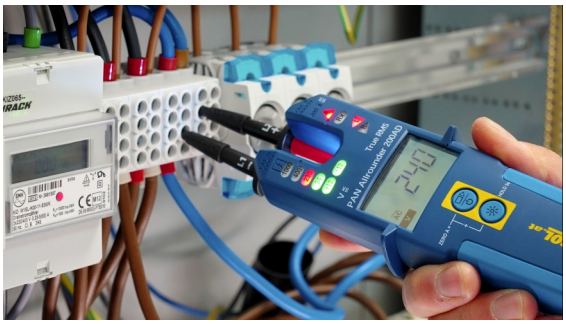

**PAN Allrounder 200AD** Video DE: **PAN Allrounder 200AD** Video EN: